

Quick Start Guide

CRASH

40W LED Kaleidoscope | Pattern + Laser.



MACROLITE

www.macrolite.store

1. IMPORTANT SAFETY



Caution

To reduce the risk of fire or electric shock, do not expose this

appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.



Caution

These service instructions are for use by qualified service personnel

only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel.

1. Open-package Inspection

When you receive the product, please check whether the product is damaged during transportation, and verify that the master case includes the following parts:

Moving Head light: 1 pc
Signal cable: 1 pc
User's manual: 1 pc

For reasons of safety and approval (CE), any personal reconstruction and/or modification of this product is prohibited. Please note that damage caused by modifications performed manually to this device is not covered by the warranty.

This product leaves our factory in perfect condition. Please follow all notes in these operating instructions to maintain this condition and ensure the safe operation of the product.

Any damage caused as a result of non-compliance with these operating instructions voids the warranty. The manufacturer does not accept liability for

damage to property or personal injury resulting from improper handling or failure to observe these instructions.

Store these operating instructions in a safe place for later reference, and pass them to any new holder when selling, lending, or transferring this device to another party.

2. Instruction


This product is a lighting effect that creates special light effects with one lamp. To generate these effects, the product must be connected to mains and a DMX-512 compatible controller.

This product is designed for 110–220V, 50/60Hz A/C operation and exclusively for indoor use.

If used for any purpose other than those described in these operating instructions, the device may suffer damage and the warranty becomes void. Any other use involves risks such as short circuits, electric shock, etc.

3. Safety and Maintenance:

- Indoor use only
- Make sure the equipment load-bearing structures can withstand more than 10 times the weight of the fixture when installed above ground.
- Disconnect from power supply before replacing lamp, fuse, or other accessories.
- Operate only under electrical standards with leakage protection device A/C.
- Allow the unit to cool down for 15 minutes before replacing lamps.
- Do not use accessories or parts from other companies.
- Contact your specialized dealer for any technical problems.



Please read this manual carefully before operating this product.

2. OVERVIEW

The 40W LED effect light power, precision, and color in a compact design — perfect for stages, clubs, events, and audiovisual productions.

It features a high-intensity 8*3W monochrome LED as the main beam, It integrates five-in-one effects, including kaleidoscope, patterns, laser, stroboscope, and laser patterns, to provide rich combined effects.

It features kaleidoscopic infinite rotation and pattern rotation, the unit offers full control through DMX512 (9 channels) or in

Auto, Sound, and Master/Slave modes.

The LED display with four control buttons allows easy access to settings such as sound sensitivity, motor inversion, speed, Infrared remote control, effect, and strobe adjustments.

Powerful, fast, and versatile — this effect light is built to deliver a professional visual impact, whether used in fixed installations or mobile setups.

Contents of the carton

- 1 × Moving Light
- 1 × Mains Lead
- 1 × User Manual
- 1 × Hanger

Specifications:

- **Power supply:** 110–220V, 50/60Hz
- **Power consumption:** 40W
- **Parameters:** 8PCS 3W monochromelamp beads, 2PCS5W yellow strobe, 1PCS100 mW red laser, 3PCS50 mW green laser, 1PCS80 mWblue laser.
- **Dimmer/Strobe:** Electronic 0–100%, 1–20/s
- **Play mode:** Auto, sound, M/S, DMX512 (9 CHs)
- **Display:** 4-button menu system, LED display making it easy to navigate
- **DMX cable:** 3-pin XLR DMX connectors
- **Power cable length:** 1.2m (IEC) IEC Output ternary power supply
- **Effect:** Pixel control of each LED, fast moving beams and color changes create the ultimate visual effect

3. DISPLAY INSTRUCTION:

Access control panel functions using the four panel buttons located directly underneath the LED Display.

BUTTON	FUNCTION
<MENU>	Used to access the menu or to return to a previous menu option
<UP>	Scrolls through menu options in ascending order
<DOWN>	Scrolls through menu options in descending order
<ENTER>	Used to select and store the current menu or option within a menu

When a menu function is selected, the display will show immediately the first available option for the selected menu function; to select a menu item, press "ENTER".

4. DISPLAY MENU

LCD Menu Instruction

Show	Function	Second-Level Menu
A001-512	DMX pattern	Address code adjustment
SH01	pattern	<p>After entering Go mode, press Save Set the motor speed speed SP 01-09 The larger the fourth digit value is, the faster the speed is</p>
SH02	kaleidoscope + flash	
SH03	Laser + flash	
SH04	Laser + strobe + pattern	
SH05	The kaleidoscope + laser + strobe	
SH06	The kaleidoscope + the laser + the pattern	
SH07	The kaleidoscope + laser + pattern + strobe	
Sn01	Sound Control Mode 1	<p>After entering voice mode, press Save Set the voice control sensitivity level SE01-09 The higher the fourth digit value, the higher the sensitivity</p>
Sn02	Sound Control Mode 2	
FS01-10		<p>After entering the strobe mode, press the Save button Set the frequency brightness level of FL00-25 The larger the latter two values, the higher the brightness</p>

5. DMX CHANNELS

15 Channels

channel	function	The channelvalue	Function setting
1	phantoscope Color control	0-7	douse the glim
		8-15	red
		16-23	hispid arthraxon
		24-31	blue
		32-39	white
		40-47	Red + green
		48-55	Green + blue
		56-63	Blue + white
		64-71	Red + white
		72-79	Red + blue
		80-87	Green + white
		88-95	Red + green + blue
		96-103	Red + green + white
		104-111	Green + blue + white
		112-119	Red + blue + white
		120-127	Red + green + blue + white
		128-191	Color jump speed from slow to fast
192-255	Red, green, blue and white strobe from slow to fast		
2	kaleidoscope motor	000-004	cease
		005-127	Clockwise rotation is from slow to fast
		128-133	cease
		134-255	Counterclockwise rotation is from slow to fast
3	Pattern Color control	0-7	douse the glim
		8-15	red
		16-23	hispid arthraxon
		24-31	blue
		32-39	white
		40-47	Red + green
		48-55	Green + blue
		56-63	Blue + white
		64-71	Red + white
		72-79	Red + blue
		80-87	Green + white
		88-95	Red + green + blue
		96-103	Red + green + white
104-111	Green + blue + white		

5. DMX CHANNELS

		112-119	Red + blue + white
		120-127	Red + green + blue + white
		128-191	Color jump speed from slow to fast
		192-255	Red, green, blue and white strobe from slow to fast
4	Pattern motor	000-4	cease
		005-255	From slow to fast rotation
5	Combined laser control	0-15	douse the glim
		16-31	red
		32-47	hispid arthrxon
		48-63	blue
		64-79	Red + green
		80-95	Red + blue
		96-111	Green + blue
		112-127	Red + green + blue
6	Combined laser motor	000-004	cease
		005-255	Rotation from slow to fast
7	Independent laser control	0-31	Close the laser
		32-63	Green 1
		64-95	Green 2
		96-127	Green 1 + green 2
		128-255	Color jump speed from slow to fast
8	Flash speed	0-7	empty
		8-255	Flash from slow to fast
9	Built-in program	0-15	empty
		16-35	Built-in program 1
		36-55	Built-in program 2
		56-75	Built-in program 3

6. IMPORTANT

SETUP

Disconnect the power cord before replacing a fuse and always replace with the same type fuse.

Fuse replacement

With a flat head screwdriver wedge the fuse holder out of its housing.

Remove the damaged fuse from its holder and replace with exactly the same type of fuse.

Insert the fuse holder back in its place and reconnect power.

The fuse is located inside this compartment, remove using a flat head screwdriver.

Fixture Linking

You'll need a serial data link to run light shows of one or more fixtures using a DMX512 controller or to run synchronized shows on two or more fixtures set to a master/slave operating mode.

The combined number of channels required by all fixtures on a serial data link determines the number of fixtures that the data link can support.

Important: Fixtures on a serial/data link must be daisy chained in one single line.

Maximum recommended serial data link distance: 100 meters (1640 ft.)

Maximum recommended number of fixtures on a serial data link: 32 fixtures.

Data Cabling


To link fixtures together you must use data cables.

If you choose to create your own cable, please use data grade cables that can carry a high-quality signal and are less prone to electromagnetic interference.

Cable Connectors

Cablings must have a maleXLR connector on one end and a female XLR connector on the other end.

DMX connector configuration

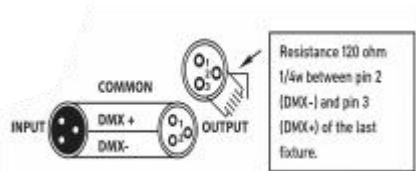

Termination reduces signal errors. To avoid signal transmission problems and interference, it is always advisable to connect a DMX signal terminator.

Caution

Don't allow contact between the common and the fixture's chassis ground. Grounding the common can cause a ground loop, and your fixture may perform erratically.

Test cables with an ohm meter to check correct polarity and to make sure the pins are not grounded or shorted to the shield or each other.

Setting up a DMX Serial Data Link

1. Connect the (male) 3-pin connector side of the DMX cable to the output (female) 3-pin connector of the controller.

6. IMPORTANT

2. Connect the end of the cable coming from the controller, which will have a (female) 3-pin connector, to the input connector of the next fixture consisting of a (male) 3-pin connector.
3. Then, proceed to connect from the output as stated above to the input of the following fixture, etc.

returned, it is important that the fixture be returned in the original factory box and packing.

Sound Activated Mode

The unit responds to sounds picked up by the built-in microphone to create a light show.

The sound changes the color and the position of the effect.

This mode enables the unit to act as a Master to other Slave units.

Built-in Program Mode

As the unit can be mounted hung on a truss system or stand on a flat surface, pan, tilt and LED display settings can be reversed to provide correct coverage and ease of use.

Unpacking Instructions

Immediately upon receiving a fixture, carefully unpack the carton and check the contents to ensure that all parts are present and have been received in good condition.

Notify the freight company immediately and retain packing material for inspection if any parts appear to be damaged from shipping or the carton itself shows signs of mishandling.

Keep the carton and all packing materials.

In the event that a fixture must be



experience the light.

MACROLITE

www.macrolite.store